

Bullet IP Camera




Revlight Security is a service provider for CCTV Camera Security systems. The company, which is a subsidiary of Revlight Solutions, is run by a team of highly qualified IT Engineers.

The Revlight Security Team provides services with by incorporating Revlight Solution's aim of providing customers with cost effective, consistent and quality services

With the same goals and values in mind, Revlight Security is assured to offer its clients with cost friendly and high standard-functional CCTV Camera Security Systems.

Features:

- UP to 2 megapixel resolution(1920 x 1080)
- 30fps@2MP (1920 x 1080)
- H.265+ / , H.265, H.264.
- Day/Night (ICR)&3D DNR&AWB&AGC
- IR range(5~15m)
- Lens (2.8 mm)
- Support mobile phone monitoring and P2P function
- PoE function
- IP66 rating

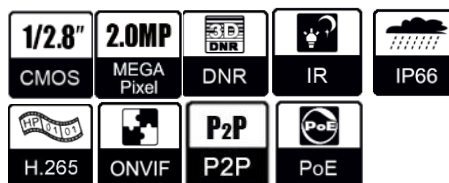

Product Specifications:

Camera	
Media Processor	High-performance Hisilicon DSP
Image Sensor	1/2.8" 2MP progressive scan CMOS
Shuttle time	1/5s to 1/50,000s
Min Illumination	Color: 0.001 Lux /F1.2 , 0Lux IR On
Lens	2.8mm
IR Range	Up to 15m
Day&Night	IR cut filter with auto switch
Compression	

Video Compression	H.265/ H.265+ /H.264/
Audio Interface	G.711 standard,1ch input& output, dual voice talkback, amplifier play
Image	
Max Image Size	1920(H)×1080(V)
Stream	Dual-stream, Dual-stream, Main stream:1920×1080,1280×960,1280×720) Sub-stream: 800×448,640×480,640×360,352×288
Frame Rate	2MP @30FPS, support 7~30 FPS adjustable
Network	
Alarm Trigger	motion detection and IO alarm linkage, center prompt and picture pop-up after IO alarm
Protocols	IPv4/IPv6、 RTSP/RTP/RTCP、 TCP/UDP、 HTTP、 DHCP、 DNS、 FTP、 DDNS 、 PPPoE、 SMTP、 Onvif
Onvif	V2.4 Version
Browser	IE(8、 9、 10、 11)
Software Development Kit	SDK
Interface	
Network	1 RJ45 10M/100M adaptive Ethernet port
General Specifications	
Operating Conditions	-40°C ~ 80°C, humidity less than 95%
Power Supply	DC12V±10%, PoE (802.3af)
Power Consumption	5W
Weather proof rating	IP66
Weight(kg)	0.55