




2MP Underwater Speed Dome Network Camera

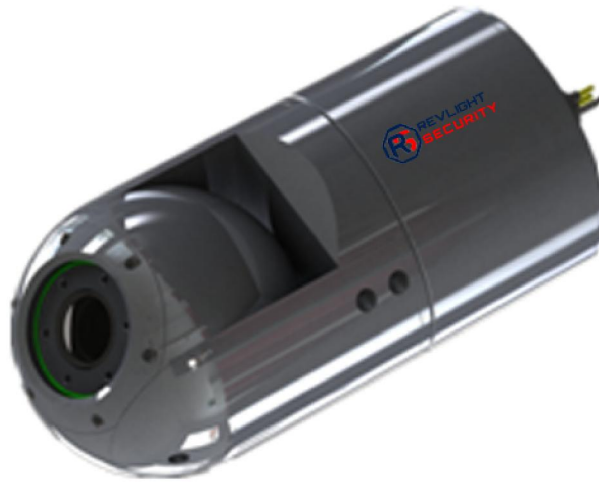

Main Features:

- * 10X optical zoom, adopt high performance sensor, resolution up to 1920*1080
- * Horizontal directly :360° continuous rotation, vertical direction : -5°-90°, no monitor area
- * open SDK, support many network protocols and networking mode.
- * Can provide flexible customization service



Office

7 Temasek Boulevard Level 32,
Suntec Tower One Singapore 038987
+65-6678-6557
sales@revlightsecurity.com

Showroom

200 Jalan Sultan
#10-07, Singapore
199018

Dimension

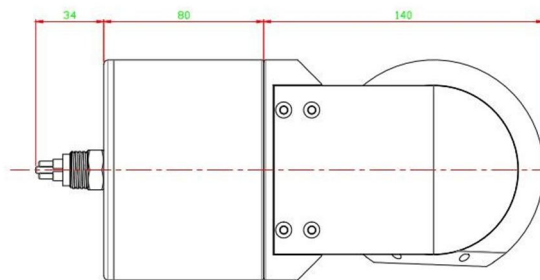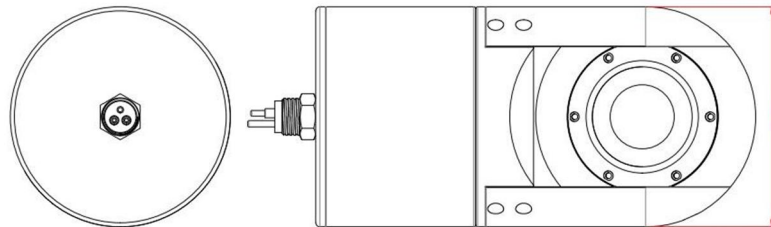

PLC Network Receive



Office

7 Temasek Boulevard Level 32,
Suntec Tower One Singapore 038987
+65-6678-6557
sales@revlightsecurity.com

Showroom

200 Jalan Sultan
#10-07, Singapore
199018



Parameter


Product Name	
Product Name	Underwater HD Speed Dome IP Camera
Model	TPS-UNC-200 (B/T)
Main Parameter	
Resolution	2MP/1080P ,10X Zoom H.265
Image Sensor	H13516EV300+1/2.8"Sony335 sensor
Signal Type	Network Signal
Minium Illumination	0.001Lux@F1.2 (color mode) ; 0.0001Lux@F1.2 (white mode)
Image Output	2MP H265/H264 1080P
Video Processing	H265/H.264 video coding ,support dual stream ,AVI format ,support code stream;0.1M~6Mbps adjustable ,frame adjustable.
Signal Interface	1 channel 10/100BaseT ethernet ,RJ45 interface.
Business Function	Support WEB configuration ,OSD, real time video transmission, motion detection and central picture remind and image popup linkage ; support JPEG capture ; support unified client remote control monitoring software
Compatibility	Support standard ONVIF platform access
Lens	
Lens	4.7~96mm auto zoom lens
Focal Length	10X Zoom
Function	
Function	Support one key reset function, support AP mode realize point to point watch
	Support unified client remote monitoring software ,platform
	Provide complete SDK file ;
Common	

Office
 7 Temasek Boulevard Level 32,
 Suntec Tower One Singapore 038987
 +65-6678-6557
 sales@revlightsecurity.com

Showroom
 200 Jalan Sultan
 #10-07, Singapore
 199018



Housing Material	Stainless Steel/ Titanium Alloy
Waterproof Level	0-300 meters (customized can be max to 6000 m)
Voltage	48VDC, support POE supply too
Working Temperature	-30℃~+60℃
Dimension	Φ110*220mm (exclude 34mm connector)
Weight	7Kg
Accessory	
Package	Cable ,adapter , warranty card
Customized Service	Depth
	Sensor (temperature ,pressure)
	Control display terminal

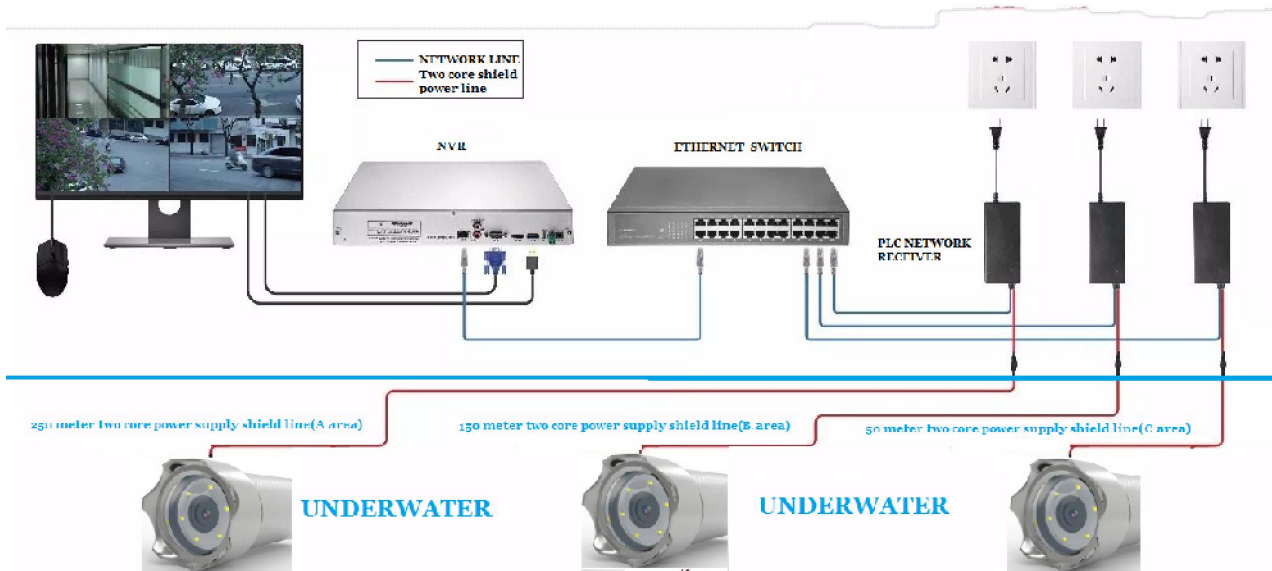

Office

7 Temasek Boulevard Level 32,
 Suntec Tower One Singapore 038987
 +65-6678-6557
 sales@revlightsecurity.com

Showroom

200 Jalan Sultan
 #10-07, Singapore
 199018